Series **AR07**

- **Electronics**
- ***High Power***
- ***Electromechanical***
- ***Custom***

ACTRONIC

Plug filter, small, suitable for all electric applications.

Filtro con spina, compatto, adatto per tutte le applicazioni elettroniche.

Technical Specifications:

Manufacture
Metal case (line connectors according to IEC 320)

Connections
IEC 320 – Standard plug (IN);
6.3 x 0.8mm. (OUT) ground terminal connected to case

Caratteristiche tecniche:

Costruzione
Custodia metallica (presa rete IEC 320)

Terminali
Ingresso presa rete IEC 320,
uscita Faston 6.3 x 0.8mm.
Terminale di terra collegato al contenitore.

Electrical specifications:

Rated voltage (Vr)	max 250 Vac at 50/60 Hz
Rated current (Ir)*	refferred to room temp.= 40°C
Leakage current (IL)	≤ 0,8 mA
Voltage test (2s.)	line to ground 2250Vdc line to line 1450Vdc
Climatic category	HPF (25/085/21) -25°C to +85°C

Caratteristiche elettriche:

Tensione nominale (Vr)	max 250 Vac at 50/60 Hz
Corrente nominale (Ir) *	riferita ad una temp.di 40°C
Corrente di fuga (IL)	≤ 0,8 mA
Tensione di prova (2s.)	linea e massa 2250Vdc linea e linea 1450Vdc
Categoria climatica	HPF (25/085/21) -25°C to +85°C

Circuit diagram

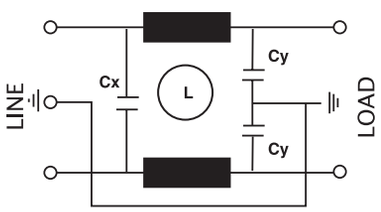

Code	*IR(A)**	*Cx(µF)*	*Cy(pF)*	*L(mH)*
AR07.1A	1	0.1	3300	3.7
AR07.3A	3	0.1	3300	1.8
AR07.6A	6	0.1	3300	0.7
AR07.10A	10	0.1	3300	0.3

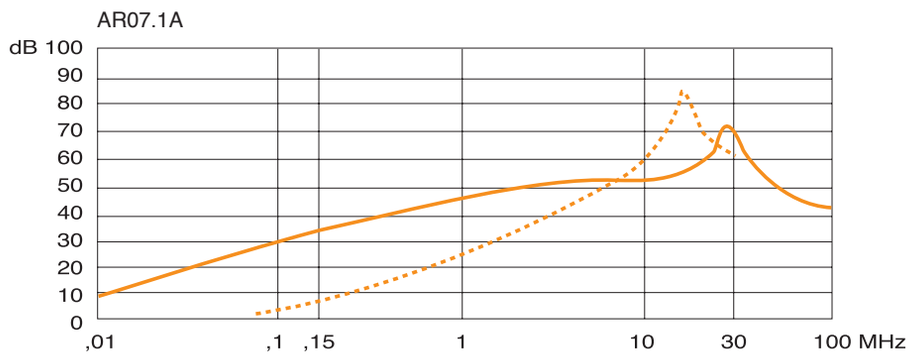

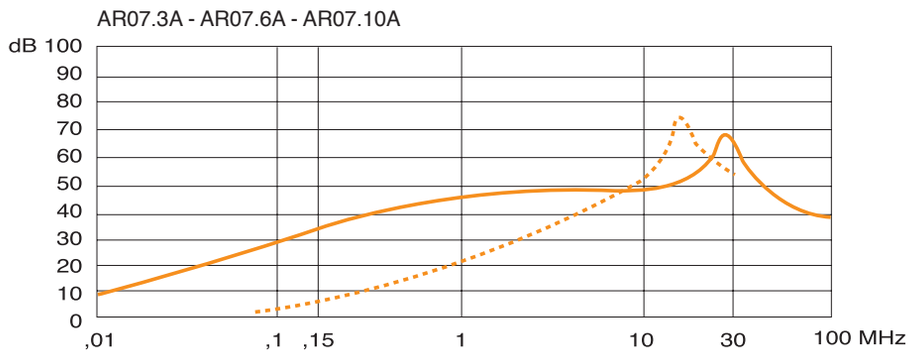

ASYMMETRICAL (Line to ground)
SYMMETRICAL (Line to Line)

APPROVALS

CE RoHS COMPLIANT

TÜVRheinland C US
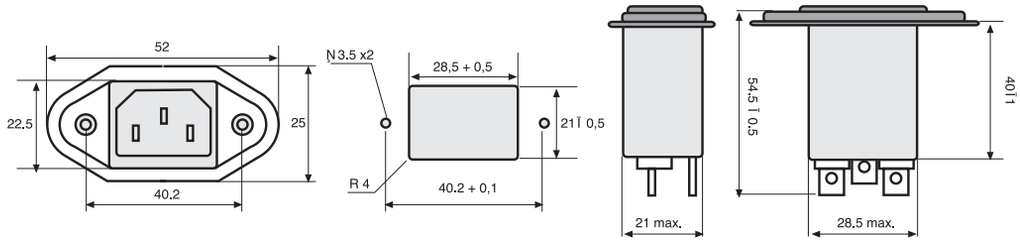
Dimensions