




Plug filter with fuse, suitable for videogames applications.

Filtro con spina e fusibile, adatto per applicazioni videogiochi

Circuit diagram

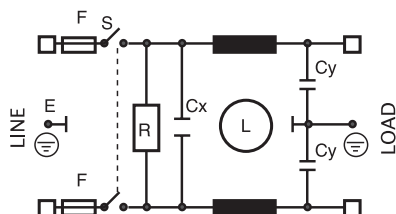

Technical Specifications:

Manufacture

Plastic case and line connector with 2 fuses.
Internal components sealed with self-extinguishing resin Vo

Connections

Faston 6.3 x 0.8mm.

Electrical specifications:

Rated voltage (Vr)	max 250 Vac at 50/60 Hz
Rated current (Ir)*	referred to room temp.= 40°C
Leakage current (IL)	≤ 0,6 mA
Voltage test (2s.)	line to ground 3000 Vdc or 1800 Vac line to line 1700 Vdc
Climatic category	HPF (25/085/21) -25°C to +85°C

Caratteristiche tecniche:

Costruzione

Custodia plastica e presa rete con 2 fusibili.
Componenti interni sigillati con resina autoestinguente Vo

Terminali


Faston 6.3 x 0.8mm.

Caratteristiche elettriche:


Tensione nominale (Vr)	max 250 Vac at 50/60 Hz
Corrente nominale (Ir) *	riferita ad una temp.di 40°C
Corrente di fuga (IL)	≤ 0,6 mA
Tensione di prova (2s.)	linea e massa 3000 Vdc o 1800 Vac linea e linea 1700 Vdc
Categoria climatica	HPF (25/085/21) -25°C to +85°C

Code	IR(A)*	Cx(μF)	Cy(pF)	L(mH)	R(MΩ)
AR12.2F.1A	1	0.22	2500	6	1
AR12.2F.2A	2	0.22	2500	2	1
AR12.2F.4A	4	0.22	2500	1	1
AR12.2F.6A	6	0.22	2500	1	1



Asymmetrical (Line to ground)

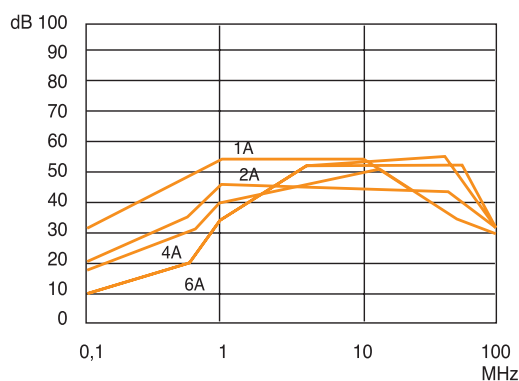

Symmetrical (Line to line)

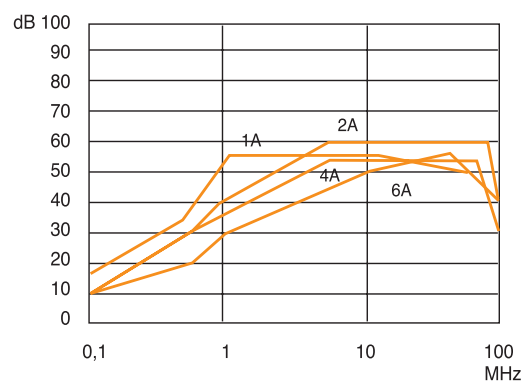

Dimensions

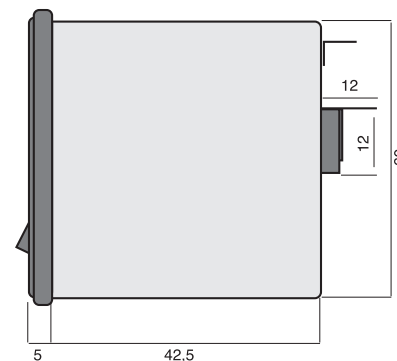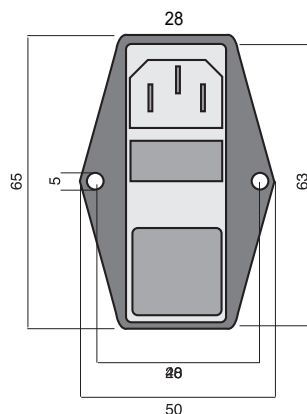

APPROVALS

